

BELDEN Multi-Conductor Cables



RoHS Compliant This page of product is RoHS compliant.







UNSHIELDED AUDIO, CONTROL, AND INSTRUMENTATION CABLE

- Tinned copper stranded, PVC insulated, conductor cabled. Chrome PVC jacket
- Non-Plenum

Recommend Heat Shrink



| Belden Part No. | Fig. | Number of Conductors | AWG (Stranded) | Nominal O.D. (in.) | 100 ft. Spools | | 500 ft. Spools | | 1000 ft. Spools | |
|---------------------------------------|------|----------------------|----------------|--------------------|------------------|----------------------|------------------|----------------------|------------------|-----------------------|
| | | | | | MOUSER STOCK NO. | Price Per 100' Spool | MOUSER STOCK NO. | Price Per 500' Spool | MOUSER STOCK NO. | Price Per 1000' Spool |
| UL AWM Style 2464, (300V 80°C) | | | | | | | | | | |
| 9439 | A | 7 | 20 (7 x 28) | .260 | 566-9439-100 | - | 566-9439-500 | - | - | - |
| 9444 | A | 4 | 20 (7 x 28) | .217 | 566-9444-100 | - | 566-9444-500 | - | 566-9444-1000 | - |
| 9445 | A | 5 | 20 (7 x 28) | .239 | 566-9445-100 | - | 566-9445-500 | - | - | - |
| 9455 | A | 9 | 20 (7 x 28) | .317 | 566-9455-100 | - | - | - | - | - |
| UL AWM Style 2598, (300V 60°C) | | | | | | | | | | |
| 8489 | A | 4 | 18 (19 x 30) | .257 | 566-8489-100 | - | 566-8489-500 | - | - | - |
| 8465 | A | 5 | 18 (19 x 30) | .282 | 566-8465-100 | - | 566-8465-500 | - | - | - |
| 8467 | A | 7 | 18 (19 x 30) | .314 | 566-8467-100 | - | - | - | - | - |
| 8466 | A | 12 | 18 (19 x 30) | .412 | 566-8466-100 | - | - | - | - | - |
| 8468 | A | 15 | 18 (19 x 30) | .500 | 566-8468-100 | - | - | - | - | - |
| 8619 | A | 19 | 18 (19 x 30) | .490 | 566-8619-100 | - | - | - | - | - |
| 600V RMS 80°C | | | | | | | | | | |
| 8620 | A | 4 | 16 (19 x 29) | .376 | 566-8620-100 | - | - | - | - | - |
| 8621 | A | 7 | 16 (19 x 29) | .458 | 566-8621-100 | - | - | - | - | - |
| 9721 | A | 8 | 16 (19 x 29) | .496 | 566-9721-100 | - | - | - | - | - |
| UL AVM Style 2576, (150V 80°C) | | | | | | | | | | |
| 8443 | B | 3 | 22 (7 x 30) | .172 | - | - | 566-8443-500 | - | 566-8443-1000 | - |
| 8444 | B | 4 | 22 (7 x 30) | .185 | - | - | 566-8444-500 | - | 566-8444-1000 | - |
| 8445 | B | 5 | 22 (7 x 30) | .194 | 566-8445-100 | - | - | - | - | - |
| 9430 | B | 7 | 22 (7 x 30) | .214 | - | - | 566-9430-500 | - | - | - |
| 9421 | B | 8 | 22 (7 x 30) | .229 | 566-9421-100 | - | - | - | 566-9421-1000 | - |
| 9423 | B | 9 | 22 (7 x 30) | .244 | 566-9423-100 | - | 566-9423-500 | - | - | - |
| 8456 | B | 10 | 22 (7 x 30) | .264 | 566-8456-100 | - | - | - | - | - |
| 8457 | B | 12 | 22 (7 x 30) | .272 | 566-8457-100 | - | - | - | - | - |
| 9431 | B | 20 | 22 (7 x 30) | .345 | 566-9431-100 | - | - | - | - | - |
| 8459 | B | 25 | 22 (7 x 30) | .387 | 566-8459-100 | - | - | - | - | - |
| 9432 | B | 30 | 22 (7 x 30) | .400 | 566-9432-100 | - | - | - | - | - |

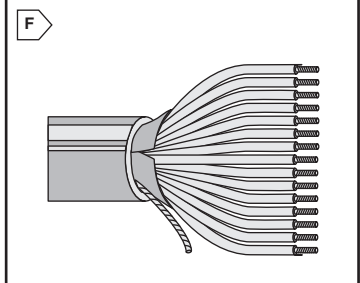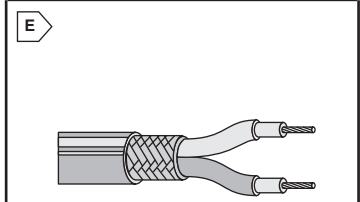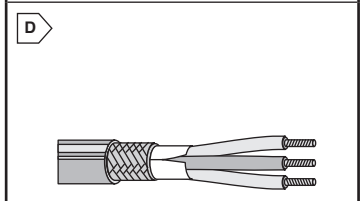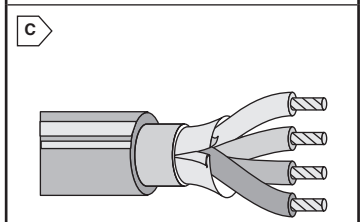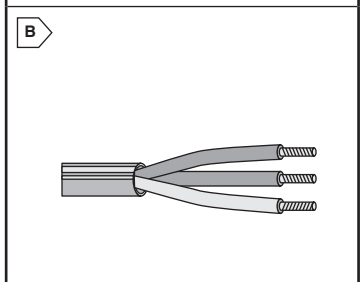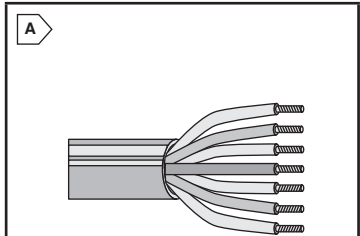

OVERALL FOIL / BRAID SHIELD COMPUTER CABLES

- Computer Cables for EIA RS-232 Applications
- Chrome PVC Jacket
- Tinned Copper Stranded
- UL AWM Style 2464 (300V 80°C)
- Semi-Rigid PVC Insulation



| Belden Part No. | Fig. | Number of Conductors | AWG (Stranded) | Nominal O.D. (in.) | 100 ft. Spools | | 500 ft. Spools | | 1000 ft. Spools | |
|-----------------|------|----------------------|----------------|--------------------|------------------|----------------------|------------------|----------------------|------------------|-----------------------|
| | | | | | MOUSER STOCK NO. | Price Per 100' Spool | MOUSER STOCK NO. | Price Per 500' Spool | MOUSER STOCK NO. | Price Per 1000' Spool |
| 9939 | C | 3 | 22 (7 x 30) | .202 | 566-9939-100 | - | 566-9939-500 | - | - | - |
| 9940 | C | 4 | 22 (7 x 30) | .215 | 566-9940-100 | - | 566-9940-500 | - | - | - |
| 9941 | C | 5 | 22 (7 x 30) | .23 | 566-9941-100 | - | - | - | - | - |
| 9942 | C | 6 | 22 (7 x 30) | .245 | 566-9942-100 | - | 566-9942-500 | - | 566-9942-1000 | - |
| 9943 | C | 7 | 22 (7 x 30) | .245 | 566-9943-100 | - | - | - | - | - |
| 9944 | C | 8 | 22 (7 x 30) | .260 | 566-9944-100 | - | 566-9944-500 | - | - | - |
| 9945 | C | 9 | 22 (7 x 30) | .280 | 566-9945-100 | - | - | - | - | - |
| 9946 | C | 10 | 22 (7 x 30) | .300 | 566-9946-100 | - | 566-9946-500 | - | - | - |
| 9947 | C | 15 | 22 (7 x 30) | .34 | 566-9947-100 | - | 566-9947-500 | - | - | - |
| 9949 | C | 37 | 22 (7 x 30) | .460 | 566-9949-100 | - | - | - | - | - |
| 9608 | C | 3 | 24 (7 x 32) | .190 | 566-9608-100 | - | - | - | - | - |
| 9609 | C | 4 | 24 (7 x 32) | .200 | 566-9609-100 | - | - | - | - | - |
| 9610 | C | 5 | 24 (7 x 32) | .215 | 566-9610-100 | - | 566-9610-500 | - | - | - |
| 9611 | C | 6 | 24 (7 x 32) | .225 | 566-9611-100 | - | - | - | - | - |
| 9613 | C | 8 | 24 (7 x 32) | .240 | 566-9613-100 | - | - | - | - | - |
| 9614 | C | 9 | 24 (7 x 32) | .253 | 566-9614-100 | - | - | - | - | - |
| 9615 | C | 10 | 24 (7 x 32) | .27 | 566-9615-100 | - | - | - | - | - |
| 9616 | C | 15 | 24 (7 x 32) | .3003 | 566-9616-100 | - | - | - | - | - |

- UL AWM Style 2919 (30V 80°C)
- Datalene® Insulation
- Chrome PVC Jacket
- Low-Capacitance Computer Cable for EIA RS-232 and EIA RS-423 Applications

| | | | | | | | | | | |
|------|---|---|-------------|------|--------------|---|---|---|---------------|---|
| 9925 | C | 3 | 24 (7 x 32) | .215 | 566-9925-100 | - | - | - | 566-9925-1000 | - |
|------|---|---|-------------|------|--------------|---|---|---|---------------|---|


OVERALL BRAID AUDIO, CONTROL, AND INSTRUMENTATION CABLE

- 200V RMS 105°C
- Chrome PVC Jacket
- Polypropylene Insulation
- 95% Tinned Copper Braid Shield

Recommend Heat Shrink



| Belden Part No. | Fig. | Number of Conductors | AWG (Stranded) | Nominal O.D. (in.) | 100 ft. Spools | | 250 ft. Spools | |
|-----------------|------|----------------------|----------------|--------------------|------------------|-----------------|------------------|-----------------|
| | | | | | MOUSER STOCK NO. | Price Per Spool | MOUSER STOCK NO. | Price Per Spool |
| 8643 | D | 3 | 30 (7 x 38) | .096 | - | - | 566-8643-250 | 1 5 |



OVERALL BRAID COMMUNICATION AND INSTRUMENTATION SHIELD CABLE

- 600V RMS 105°C
- 90% Tinned Copper Braid Shield
- MIL-W-16878 (Type) Conductors, Shielded, and Jacketed
- PVC Insulation and White PVC Jacket

Recommend Heat Shrink



| | | | | | | | | | |
|------|---|---|--------------|------|--------------|---|---|---|---|
| 9962 | E | 2 | 20 (19 x 32) | .192 | 566-9962-100 | - | - | - | - |
|------|---|---|--------------|------|--------------|---|---|---|---|

OVERALL 100% BELDFOIL® SHIELD

- Computer Cables for EIA RS-232 Applications
- UL AVM Style 2464, (300V 80°C)
- Chrome PVC Jacket
- Semi-Rigid PVC Insulation



| Belden Part No. | Fig. | Number of Conductors | AWG (Stranded) | Nominal O.D. (in.) | 100 ft. Spools | | 500 ft. Spools | | 1000 ft. Spools | |
|-----------------|------|----------------------|----------------|--------------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| | | | | | MOUSER STOCK NO. | Price Per Spool | MOUSER STOCK NO. | Price Per Spool | MOUSER STOCK NO. | Price Per Spool |
| 9533 | F | 3 | 24 (7 x 32) | .162 | 566-9533-100 | - | 566-9533-500 | - | 566-9533-1000 | - |
| 9535 | F | 5 | 24 (7 x 32) | .189 | 566-9535-100 | - | 566-9535-500 | - | 566-9535-1000 | - |
| 9536 | F | 6 | 24 (7 x 32) | .209 | 566-9536-100 | - | 566-9536-500 | - | 566-9536-1000 | - |
| 9537 | F | 7 | 24 (7 x 32) | .209 | 566-9537-100 | - | - | - | - | - |
| 9538 | F | 8 | 24 (7 x 32) | .224 | 566-9538-100 | - | 566-9538-500 | - | - | - |
| 9540 | F | 10 | 24 (7 x 32) | .244 | 566-9540-100 | - | 566-9540-500 | - | - | - |
| 9541 | F | 15 | 24 (7 x 32) | .284 | 566-9541-100 | - | 566-9541-500 | - | - | - |
| 9543 | F | 25 | 24 (7 x 32) | .339 | 566-9543-100 | - | - | - | - | - |
| 9544 | F | 30 | 24 (7 x 32) | .380 | 566-9544-100 | - | - | - | - | - |