




CIRCUIT: DPDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
		
<IN>	OFF	<ON>
2-3,5-6	OPEN	2-1,5-4

## NOTES:


1. ALL DIMENSIONS IN MM  
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25

$$X.XX = \pm 0.25$$

3. TERM. NOS. FOR REF. ONLY  
4. RATING: 0.4VA @20 max. (AC or DC)  
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT  
Copper Alloy w/Gold plate over  
Nickel plate. ▲

Copper Alloy w/Gold plate over Nickel plate.

6. CONTACT RESISTANCE: 10mILLI Ohms max initial @2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
8. INSULATION RESISTANCE: 1,000M Ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

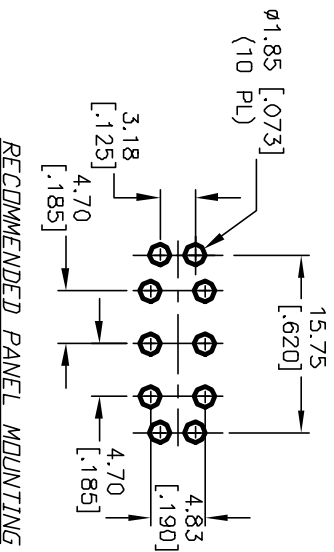

## RECOMMENDED PANEL MOUNTING

A	12759	RELEASED FOR PRODUCTION	1/27/03	CB
REV.	ECN NO.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

<b>E-SWITCH®</b>				
TITLE				
300 DP-4 J3 VS2 R E (GOLD CONTACTS)				
SCALE	DATE	DR	DWG	REV
1.5:1	1/27/03	CB	T324014	A

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

E-Switch:

[300DP4J3BLKVS2RE](#)