

3602 / 3603 / 3604 Series

Mechanical Totalizing Counter



3602 dual shaft



3603 left-hand shaft



3604 right-hand shaft


This unit counts revolutions on many different types of production machinery. Robustly constructed for continuous operation at high speeds with the main shaft running in double oil impregnated bearings to ensure accurate, long term, trouble free service. It is supplied with a double or single drive with wing bushing and customer configurable left or right side reset.

Key Features

- 6-digit 6.4mm (0.25in) readout
- Up to 3000 counts per minute with 1:1 gear ratio
- 1:1, 1:10, 2:1, 3:1, 4:1 gearings as standard
- Front viewing
- Reset to zero
- Reset by lever
- Customer configurable reset position - either left or right
- Dual, left-hand or right-hand shaft options

Reset Instructions

Do not reset **while counter is running**
Do not use an **external device** to reset counter
Do not use **excessive force** to reset counter
Make sure that all of the 0's on the display are **lined up**




Specifications

Display	White on black, decimals black on white 6.4mm (0.25in) figures
Base Material	Black PC-ABS plastic
Cover Material	Grey ABS plastic
Drive Shaft Diameter	7mm (0.275 inch) diameter
Gearing	1:1, 1:10, 2:1, 3:1, 4:1 as standard. Others on application
Bearings	Bronze, oil impregnated for life
Operating Torque	180g.cm (2.5oz.in) at 1:1 gearing
Maximum Shaft Speed	3000 RPM
Maximum Count Speed	3000 CPM
Accuracy	+/- 1%
Operating Temp	-10°C to +50°C [14°F to 122°F]
Storage Temp	-20°C to +50°C [-4°F to 122°F]
Environmental Protection	IP40
Nett Weight	200g

Measuring Wheel Ordering Information



Material	Width	12" circumference	18" circumference	1/3m circumference	1/2m circumference
Rubber Covered Plastic	3/4" (19mm)	007571	007573	007905	007574
Knurled Aluminum	3/4" (19mm)	001558	001622		

Dimensions

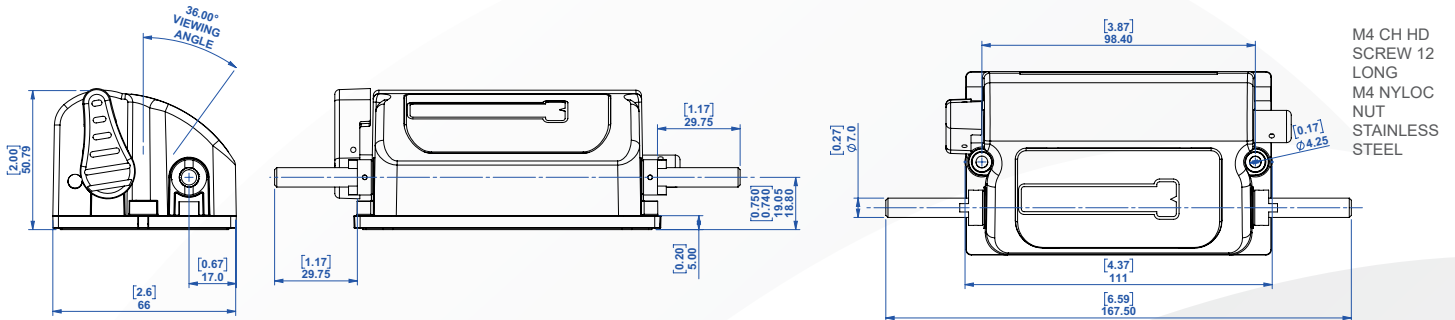

Based on standard torque guidelines for M4 machine screws, into metal nyloc nuts, through plastic components (counter base), we would recommend tightening the screws to 2.0-2.5 Nm using a calibrated torque driver.

Part Number Ordering Chart

COUNTER TYPE	NUMBER OF DECIMAL PLACES	FIG WHEEL READING	GEAR RATIO	DRIVE DIRECTION	
3602- DUAL SHAFT	0 NO DECIMAL PLACES	0 FULL FIGURES (PLAIN)	0 1:10	TC TOP COMING Material Direction (Top Coming) 	
3603- LEFT-HAND SHAFT		1 0 - 11" FIG WHEEL (FEET & INCHES)	1 1:1		
3604- RIGHT-HAND SHAFT	1 ONE DECIMAL PLACE	2 0 - 9" FIG WHEEL (FEET & TENTHS)	2 2:1	TG TOP GOING Material Direction (Top Going) 	
ALL COUNTERS ARE 6 DIGIT, FRONT VIEWING RESET POSITION IS CUSTOMER CONFIGURABLE - LEFT OR RIGHT DRIVE SHAFT WITH WING BUSHINGS FITTED AS STANDARD EXAMPLE OF CODING: 3602 - 117TG 3602 = DUAL SHAFT 1 = ONE DECIMAL PLACE 1 = 0-11" FIG WHEEL (FEET & INCHES) 7 = 2:3 TG = TOP GOING 3602-117TG = 99999 - 11 / 2:3 / TOP GOING		3 0 - 9" FIG WHEEL (YARDS & TENTHS)	3 3:1		
		4 FULL FIGURES (FEET)	4 4:1		
		5 FULL FIGURES (YARDS)	5 1:25		
		6 FULL FIGURES (METRES)	6 10:1		
		7 0 - 7/8" FIG WHEEL (YARDS & EIGHTHS)	7 2:3		
			8 128:105		
		9 0 - 9cm FIG WHEEL WITH 100 LINES(M/cm)	9 64:105		

