



Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

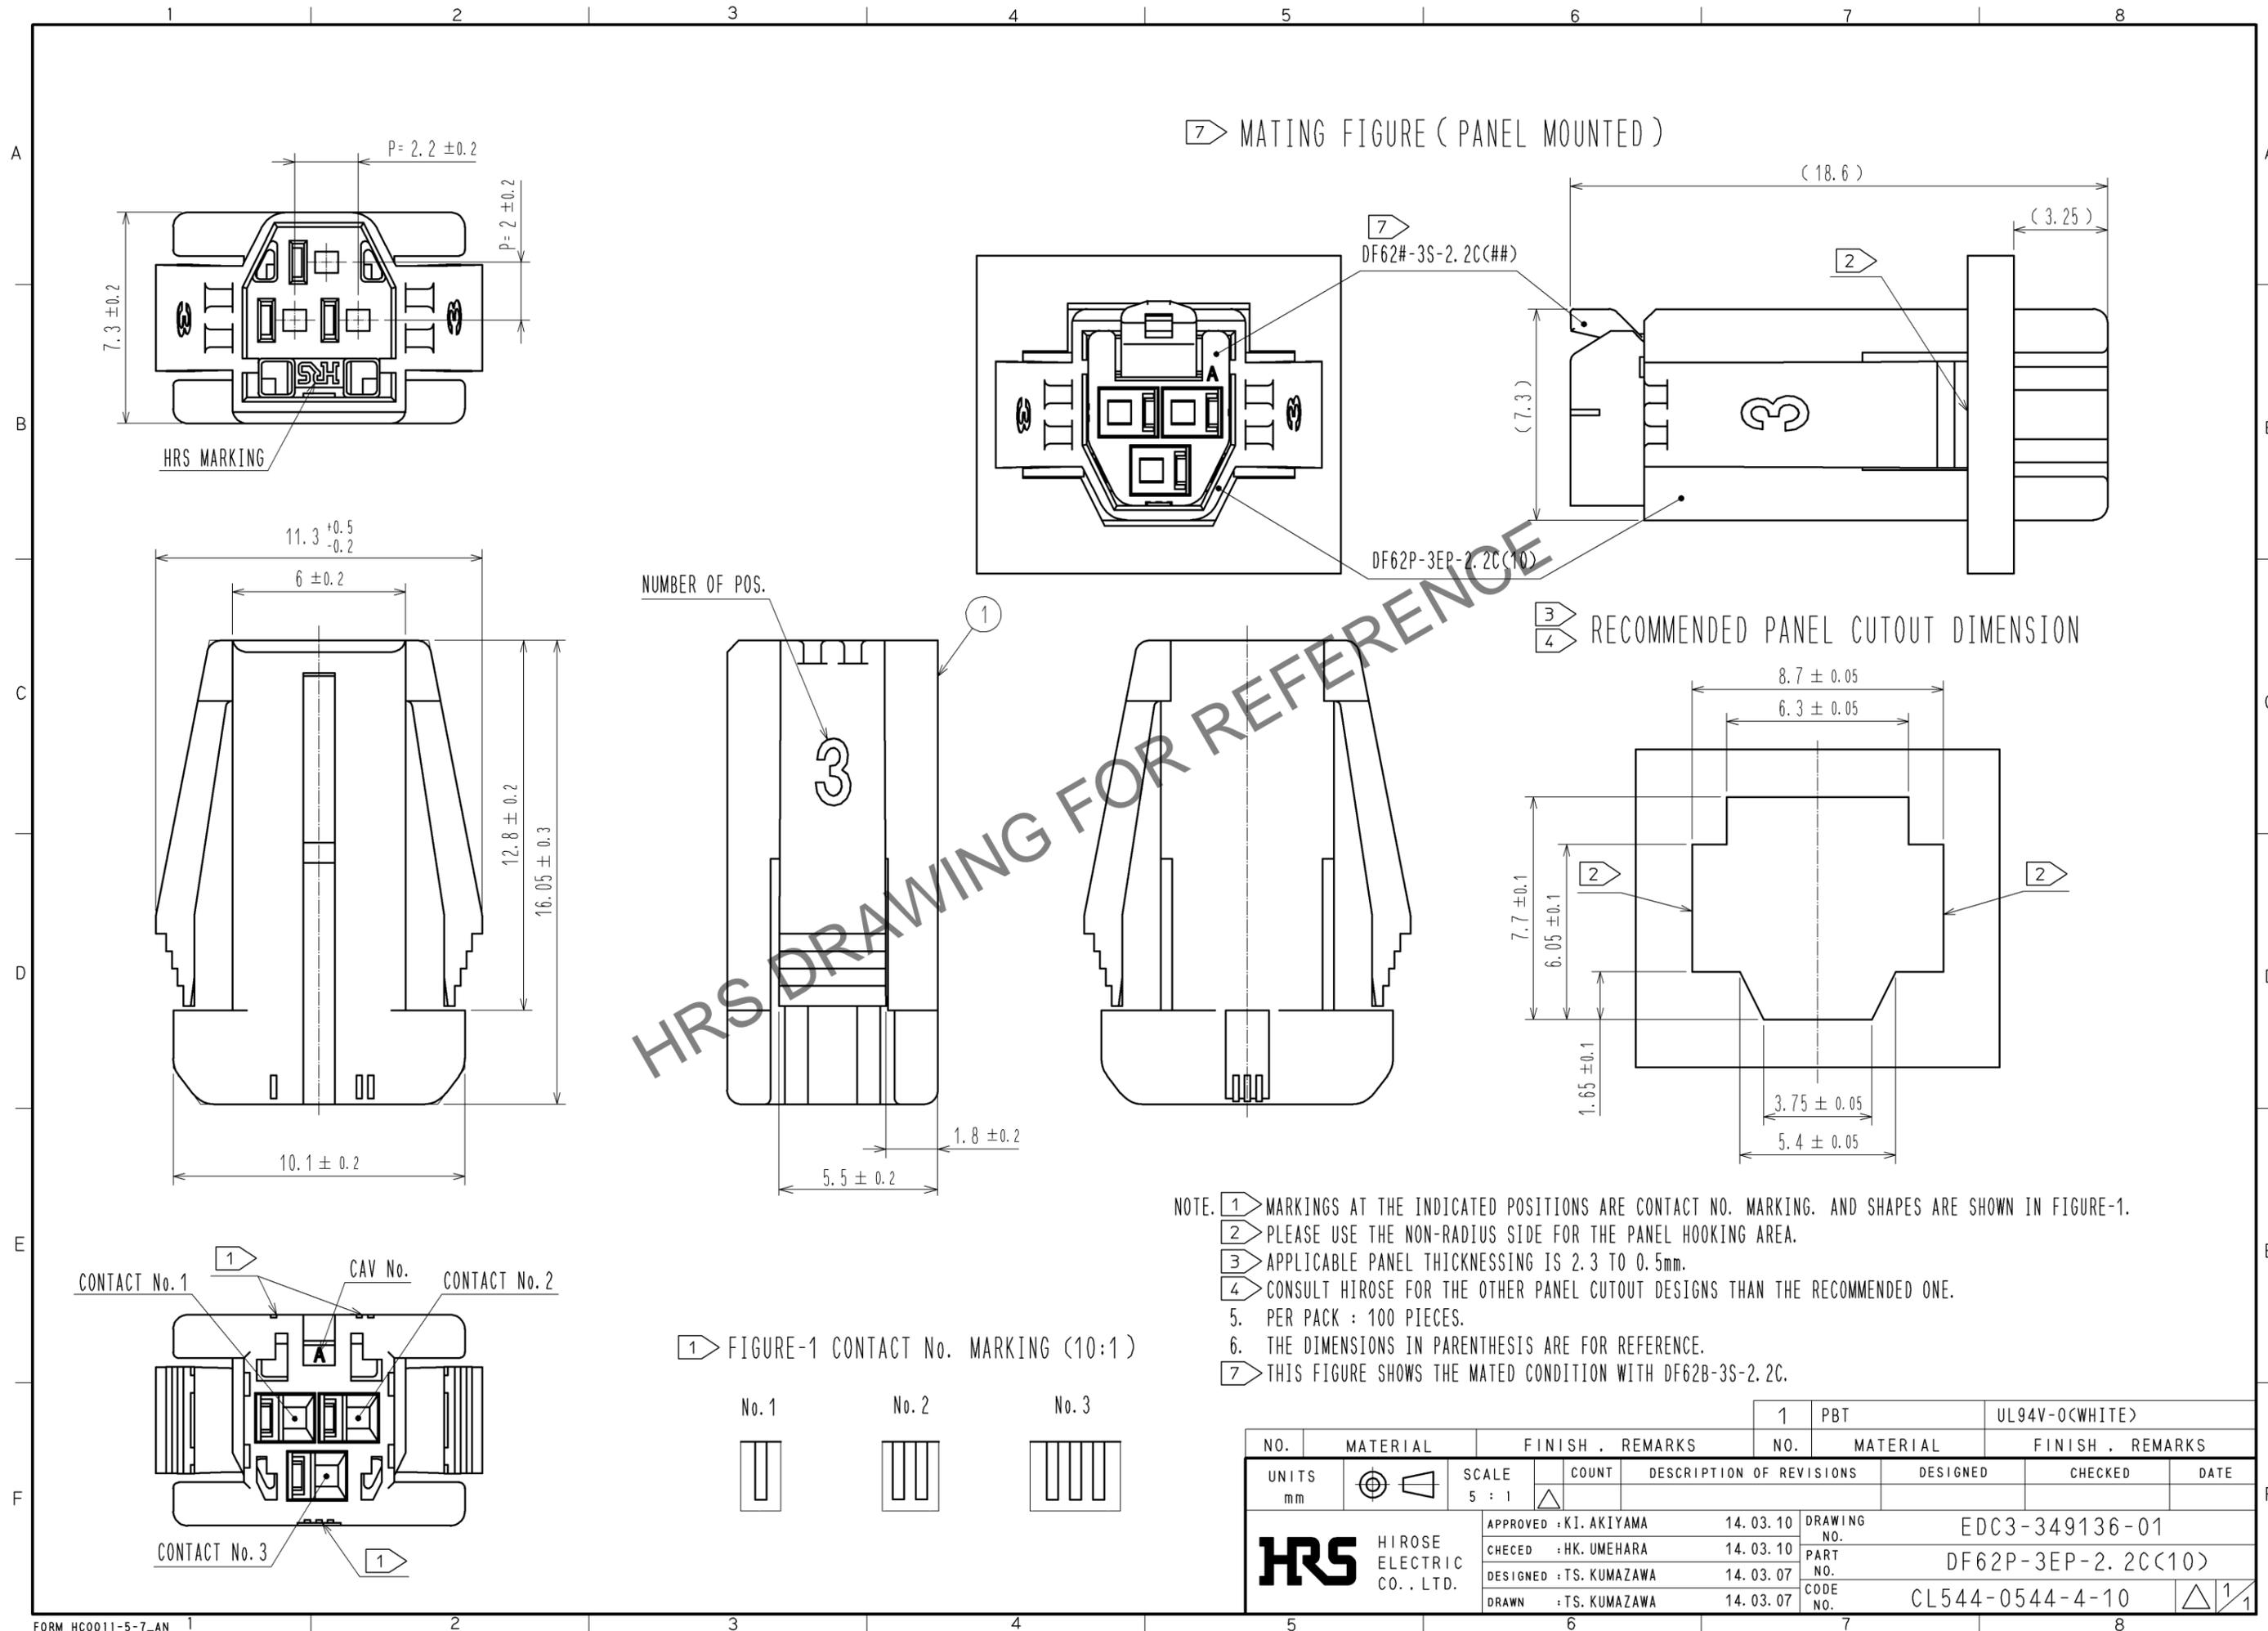

- NOTE. ① MARKINGS AT THE INDICATED POSITIONS ARE CONTACT NO. MARKING. AND SHAPES ARE SHOWN IN FIGURE-1.  
 ② PLEASE USE THE NON-RADIUS SIDE FOR THE PANEL HOOKING AREA.  
 ③ APPLICABLE PANEL THICKNESSING IS 2.3 TO 0.5mm.  
 ④ CONSULT HIROSE FOR THE OTHER PANEL CUTOUT DESIGNS THAN THE RECOMMENDED ONE.  
 5. PER PACK : 100 PIECES.  
 6. THE DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE.  
 ⑦ THIS FIGURE SHOWS THE MATED CONDITION WITH DF62B-3S-2.2C.

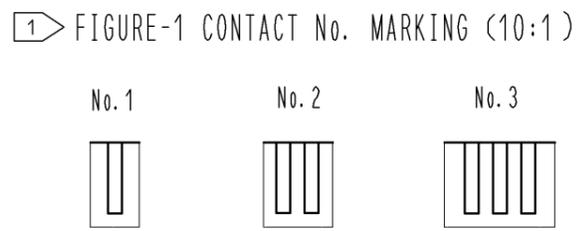

NO.		MATERIAL		FINISH . REMARKS		1	PBT	UL94V-0(WHITE)
UNITS mm		SCALE 5 : 1		COUNT		DESIGNED		CHECKED
HRS		HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA		14. 03. 10		DRAWING NO.
				CHECKED : HK. UMEHARA		14. 03. 10		PART NO.
				DESIGNED : TS. KUMAZAWA		14. 03. 07		CODE NO.
				DRAWN : TS. KUMAZAWA		14. 03. 07		CL544-0544-4-10
				DESCRIPTION OF REVISIONS		DATE		1/1
				EDC3-349136-01				
				DF62P-3EP-2.2C(10)				