


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

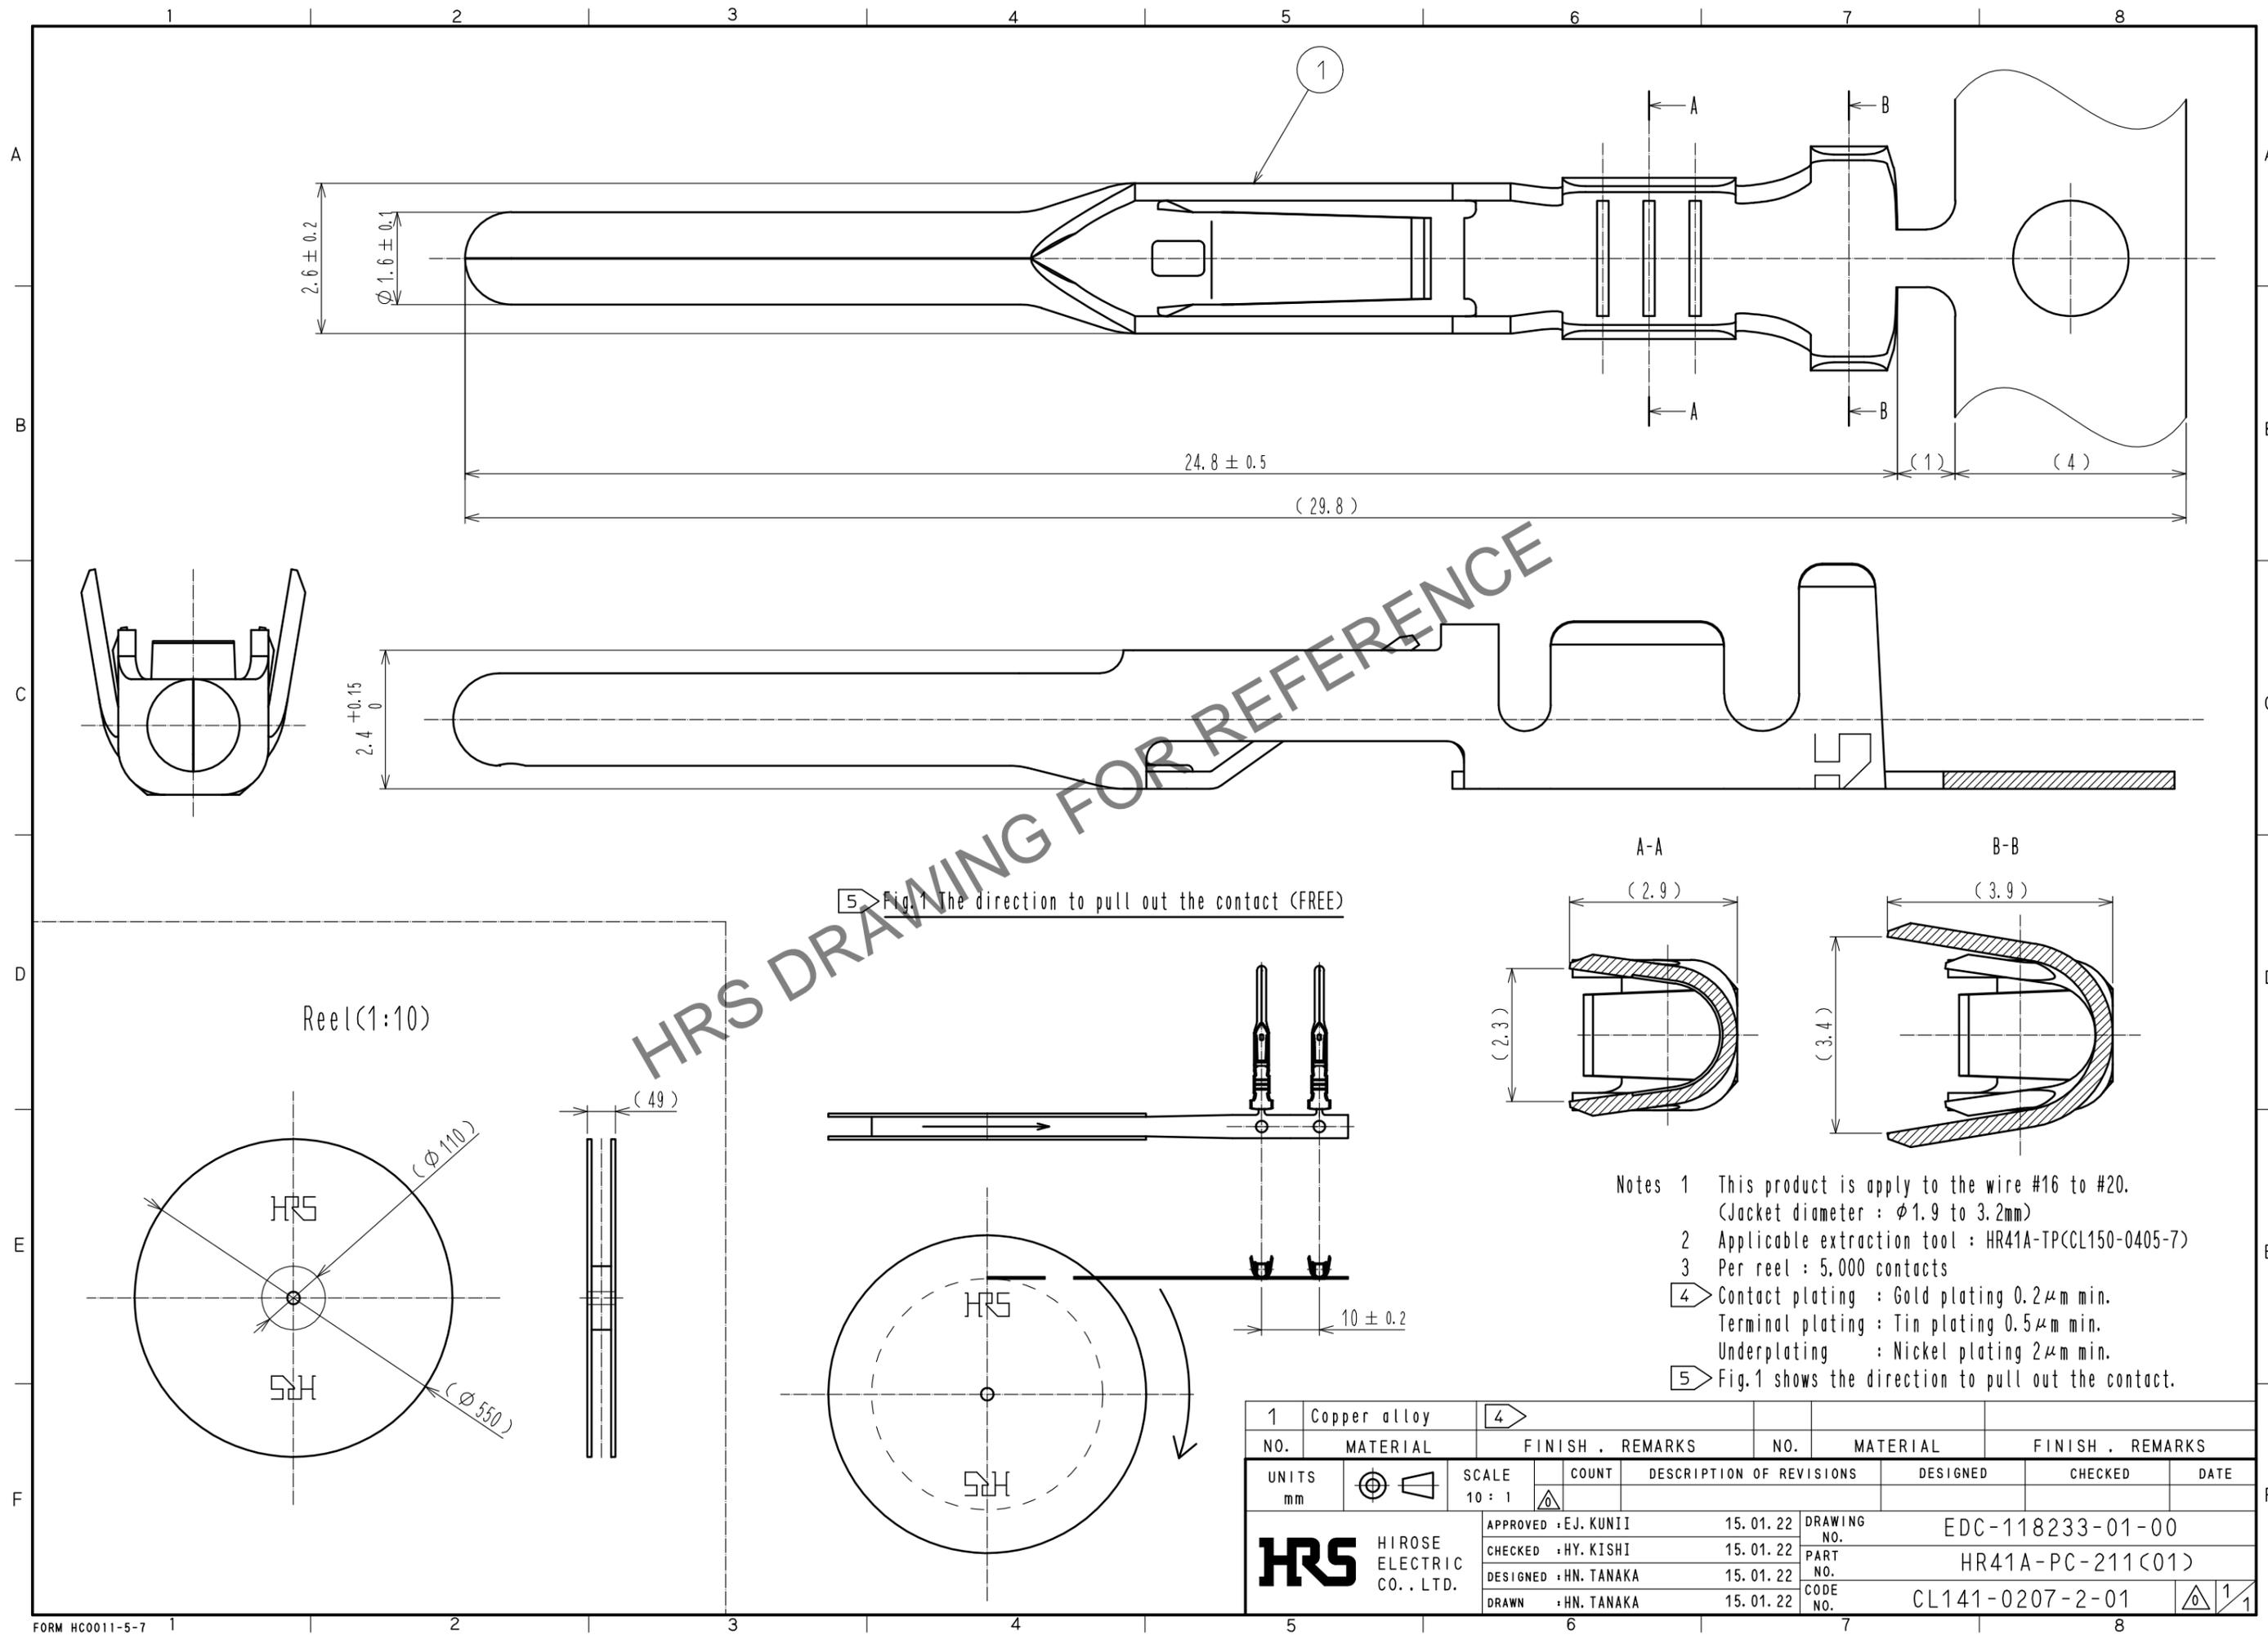

- Notes
- This product is apply to the wire #16 to #20. (Jacket diameter :  $\phi 1.9$  to  $3.2\text{mm}$ )
  - Applicable extraction tool : HR41A-TP(CL150-0405-7)
  - Per reel : 5,000 contacts
  - Contact plating : Gold plating  $0.2\mu\text{m}$  min.  
Terminal plating : Tin plating  $0.5\mu\text{m}$  min.  
Underplating : Nickel plating  $2\mu\text{m}$  min.
  - Fig.1 shows the direction to pull out the contact.

1	Copper alloy	4							
NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS		
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS			DESIGNED	CHECKED	DATE
mm		10 : 1							
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII	15.01.22	DRAWING NO.		EDC-118233-01-00			
		CHECKED : HY. KISHI	15.01.22	PART NO.		HR41A-PC-211(C01)			
		DESIGNED : HN. TANAKA	15.01.22	CODE NO.		CL141-0207-2-01			
		DRAWN : HN. TANAKA	15.01.22						