
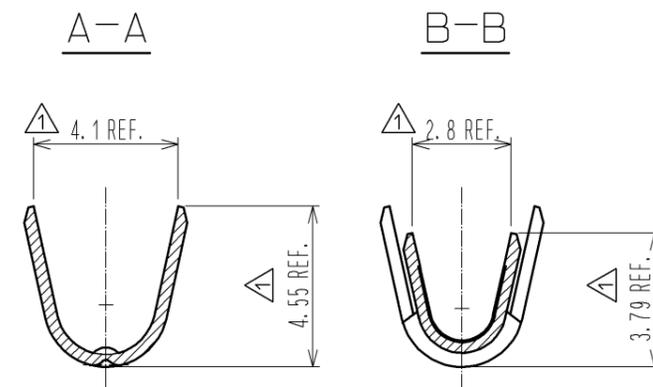
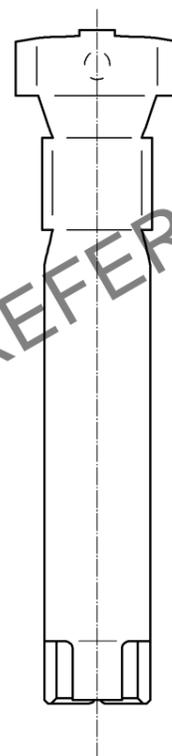
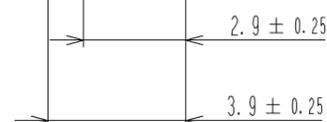
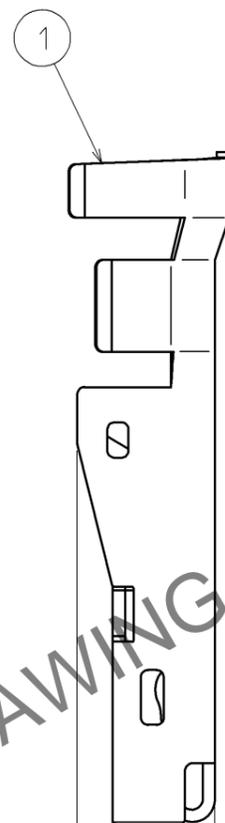
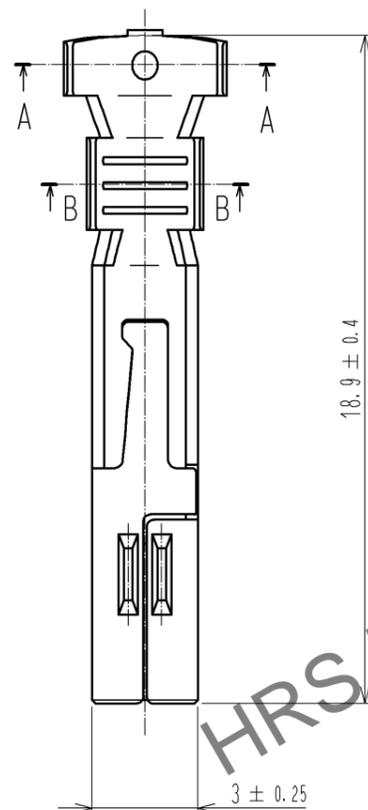



Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

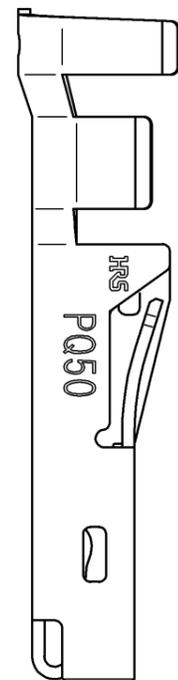

- △/△ NOTES
1. APPLICABLE WIRE IS AWG #14~#15. INSULATION DIAMETER  $\phi$  3.30mm MAX. WHEN CRIMPING AWG#14 (UL1015  $\phi$  3.80mm), DUE TO THE DESIGN OF INSULATION BARREL, THE SHAPE OF CRIMP DOES NOT COVER INSULATION. IT DOES NOT AFFECT THE PRODUCT QUALITY. REFER TO ATAI-E2926 FOR CRIMP QUALITY STANDARDS.
  2. APPLICABLE CRIMPING MACHINE AND CRIMPING CONDITIONS (CRIMP HEIGHT etc.) WILL BE SPECIFIED ACCORDING TO AWG # OR WIRE APPLIED.
  3. ONE PACKAGE CONSISTS OF 100 PCS.

NO. 1		MATERIAL COPPER ALLOY		FINISH . REMARKS CONTACT AREA : GOLD PLATING 0.2 $\mu$ m MIN. TERMINAL AREA : TIN PLATING 1 $\mu$ m MIN. UNDER PLATING : NICKEL PLATING 0.5 $\mu$ m MIN.		
UNITS mm	SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-E-004877	DESIGNED TY. MIURA	CHECKED AH. KODAMA	DATE 13.12.20
APPROVED : RI. TAKAYASU 12.12.11		DRAWING NO. EDC3-128190-00				
CHECKED : AH. KODAMA 12.12.11		PART NO. PQ50-15SCA				
DESIGNED : TY. MIURA 12.12.10		CODE NO. CL236-2043-0-00				
DRAWN : TY. MIURA 12.12.10						